

FIG. 1

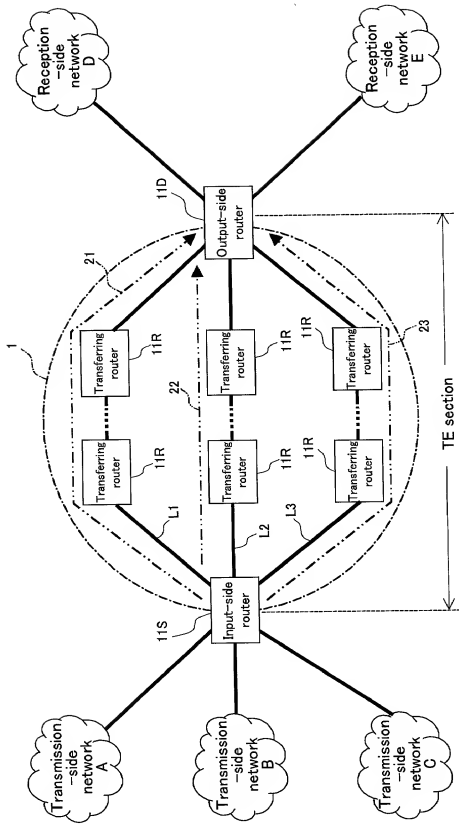


FIG. 2

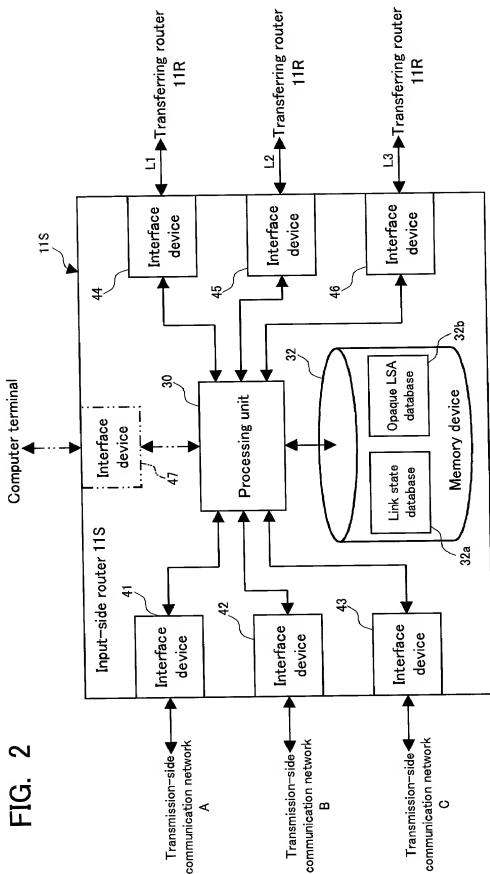


FIG. 4

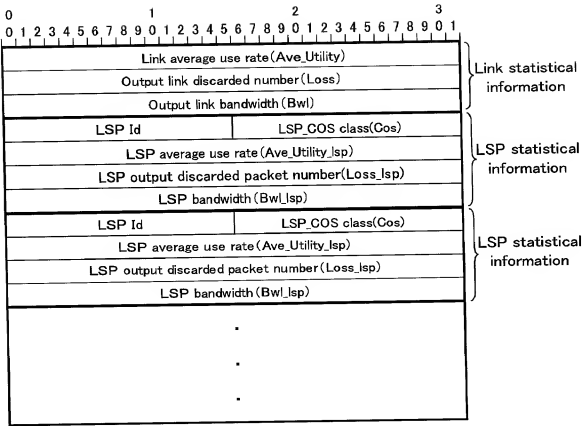


FIG. 5

/proc/net/dev file

interface	Receive						
	bytes	packets	errs	drop	fifo	frame	multicast
lo	6084	67	0	0	0	0	0
eth0	19954	324	0	0	0	0	0
eth1	0	0	0	0	0	0	0
eth2	0	0	0	0	0	0	0
atm0	10488	76	0	0	0	0	0
atm1	0	0	0	0	0	0	0
atm2	0	0	0	0	0	0	0
interface	Transmit						
	bytes	packets	errs	drop	fifo	colls	carrier
lo	6084	67	0	0	0	0	0
eth0	26630	267	0	0	0	0	0
eth1	0	0	0	0	0	0	0
eth2	0	0	0	0	0	0	0
atm0	5054	83	0	0	0	0	0
atm1	0	0	0	0	0	0	0
atm2	0	0	0	0	0	0	0

FIG. 6

/proc/atm/device file

interface type	ESI/"MAC" addr	AAL (Tx, err, Rx, err, drop)
0 eni	0020ea00co84	0(0 0 0 0) 0(83 0 76 0 0)
1 eni	0020ea005ee2	0(0 0 0 0) 0(0 0 0 0)
2 eni	0020ea005e34	0(0 0 0 0) 0(0 0 0 0)

FIG. 7

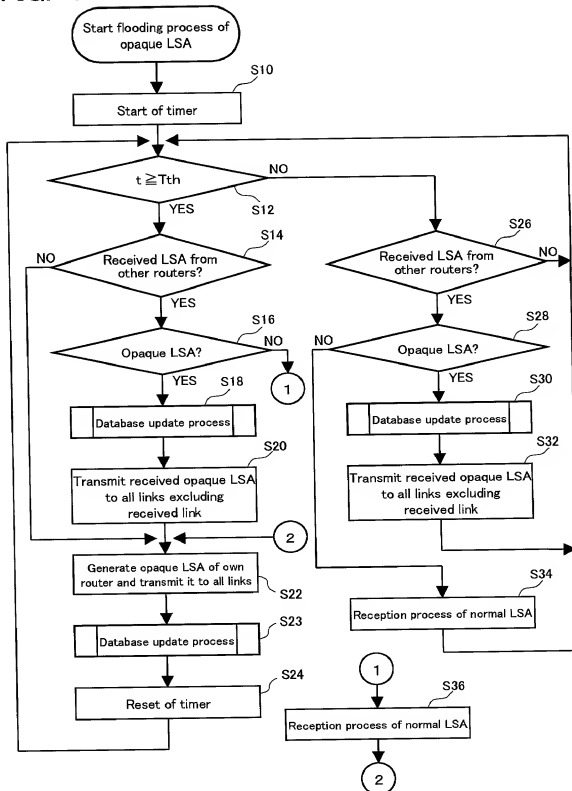


FIG. 8

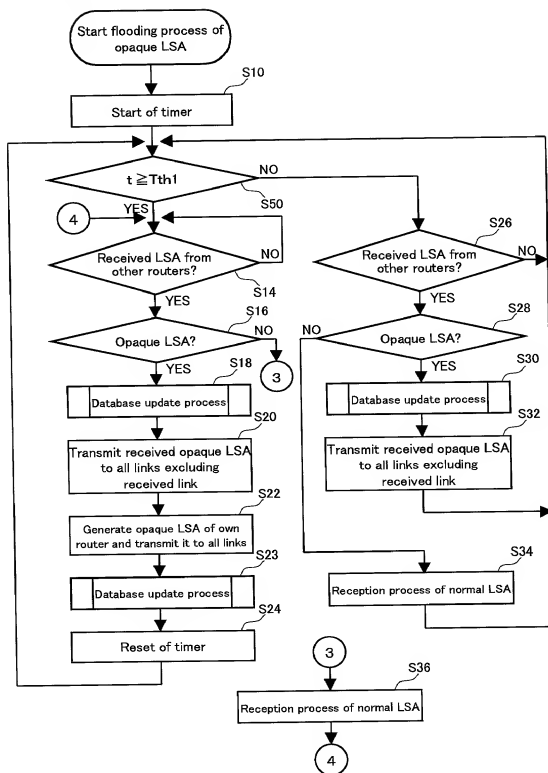


FIG. 9

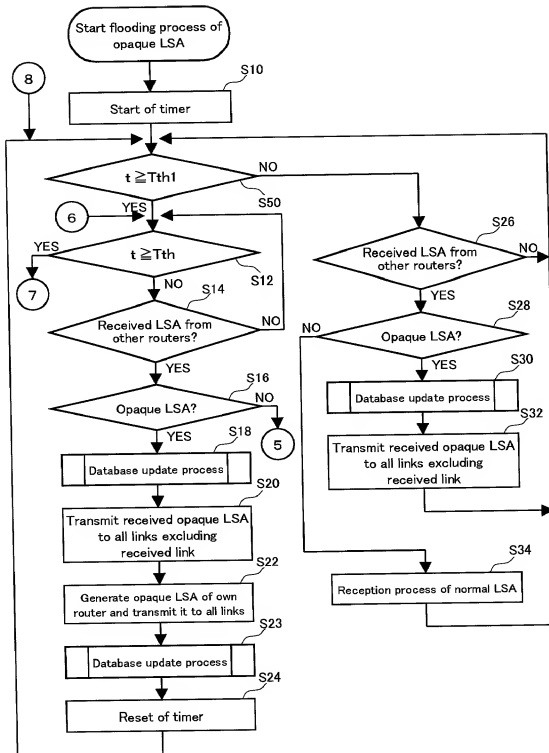


FIG. 10

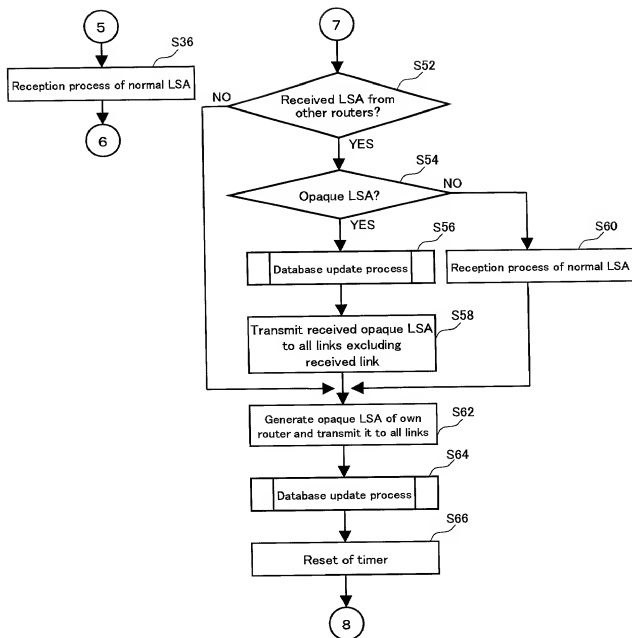


FIG. 11

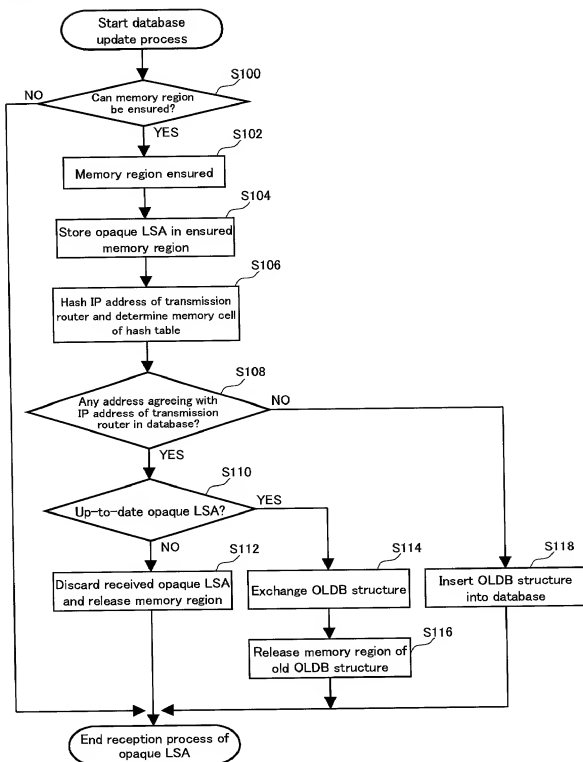


FIG. 12

